
INTRODUCTION

Greetings from far Belarus, String Samurai! Here is a quick start guide for Cobble-Stone power amp. Although CobbleStone looks like a regular pedal, it supplied by 24 volts and could damage your gear if used incorrectly. Please read guide carefully to the very end. Let's get it started!

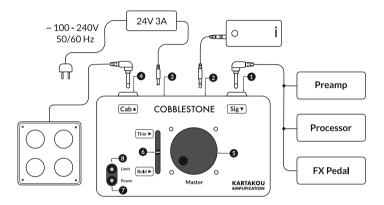

CONNECTING

- Sig connect your guitar processor/preamp/fx pedal here. Use ¼ TS (mono) instrumental cable for this:
- AUX connect your player/smartphone here for playing with backtrack. Use 1/8 TRS (stereo) cable for this;
- Opwer In connect DC 24V 3A power adapter here. Sparkle during plugging is normal:
- Cab connect ONLY guitar speaker cabinet (4 to 16 Ohm) here by ¼ TS (mono) speaker cable. Optimal load is 8 Ohm;
- **6** Master adjusts output volume;
- **Tone** − adjusts tone for Sig input. Center position has no effect and keeps input signal intact;
- **Power** indicates that power is plugged in;

- **3** Limit mutes Cobblestone output and indicates one of the following faults:
 - Input/output amplitude is too high;
 - Overheating;
 - Short circuit in load;

Please fix the reason of LIMIT indication to unmute CobbleStone output.

TECHNICAL SPECIFICATIONS

Output power: 45 Watts;

Load: 4 to 16 Ohm (8 Ohm optimal);

Power supply: 24V 3A, 5.5*2.5 plug, center positive;

Frequency response: 20-20000 Hz:

Sig impedance: 47 kOhm;

AUX impedance: 10 kOhm;

CobbleStone dimensions/weight: 114*68*33 mm/196g; Power Supply dimensions/weight: 127*55*32mm/ 210g.

DO NOTs:

- DO NOT CONNECT AMP OUTPUT TO ANY OTHER DEVICE EXCEPT GUITAR CABINET;
- DO NOT EXCEED 24 VOLTS SUPPLY;
- DO NOT CONTACT ANY METAL SURFACES INCLUDING PEDALS HOUSINGS WITH OUTPUT JACKS;
- DO NOT THINK CLASS-D AMPLIFIERS ARE NOT GOOD ENOUGH FOR YOU.

WARRANTY

This apparatus is covered by one year full warranty. Warranty void if disassembled.

CONTACTS

support@kartakou.com

☑ ▮ ☑ @kartakouamps

kartakou.com

Minsk, Belarus 2025